


Fibre carries Gigabit Ethernet data only. IES-1F2E-P requires local DC input and supplies PoE only through its two RJ45 ports.

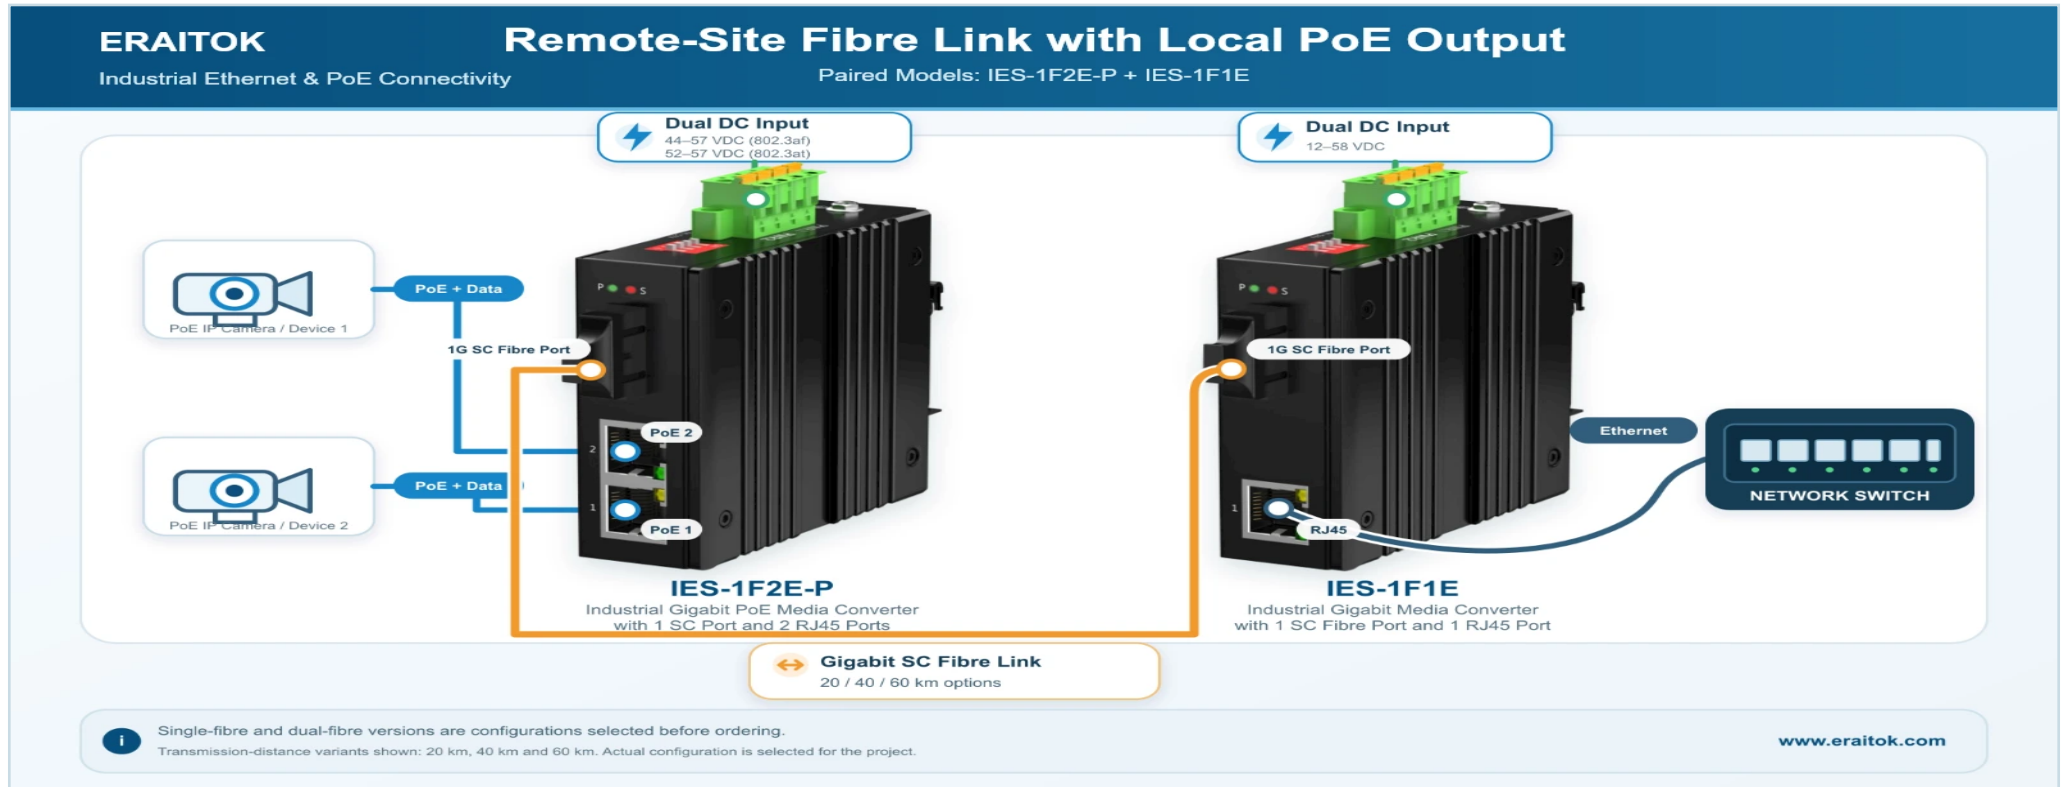

PAIRED EQUIPMENT

IES-1F2E-P
2 x Gigabit PoE+ RJ45; 1 x Gigabit SC fibre; 60 W total PoE budget; local DC input.

IES-1F1E
1 x Gigabit RJ45; 1 x Gigabit SC fibre; local DC input.

CONFIRM BEFORE ORDERING

- Pair quantity and connected PoE devices
- 20 km, 40 km or 60 km transmission variant
- Single-fibre or dual-fibre configuration
- Required PoE load and suitable local DC supplies
- ERAITOK-branded or OEM requirement

PROJECT REVIEW



Request a project review

Include quantity, fibre distance, fibre configuration and PoE load.

www.eraitek.com/contact